



# G30® Data Sheet

TI/EVO 1425 e January 2017  
Supersedes edition of June 2016

Page 1 of 6

GLYSANTIN® G30® is an engine coolant concentrate based on ethylene glycol that needs to be diluted with water before use.

GLYSANTIN® G30® contains a corrosion inhibitor package based on organic acid salts (OAT coolant). GLYSANTIN® G30® is free of nitrites, amines, phosphates, silicates and borates.

## Properties

GLYSANTIN® G30® protects engines against corrosion, overheating and frost. It effectively protects engines against corrosion and deposits in the cooling system with its vital parts, the coolant channels in the block and cylinder head, the radiator, the water pump and the heater core.

GLYSANTIN® G30® fulfills the requirements of the following coolant standards:

AS 2108-2004, ASTM D 3306, ASTM D 4985, BS 6580:2010, CUNA NC 956-16, AFNOR NFR 15-601, ÖNORM V 5123, JIS K 2234:2006, SAE J1034, SANS 1251:2005 and China GB 29743-2013.

GLYSANTIN® G30® is officially approved by the following OEMs:

- |                            |                         |
|----------------------------|-------------------------|
| • Audi / Seat / Skoda / VW | TL 774-D/F              |
| • Bentley / Lamborghini    | TL 774-F                |
| • DAF                      | MAT 74002               |
| • Daimler / Mercedes-Benz  | MB-Approval 325.3       |
| • Deutz                    | DQC CB-14               |
| • Ferrari                  | from MY 2010            |
| • MAN                      | MAN 324 Type SNF        |
| • MINI Cooper D            | from MY 2007 to MY 2011 |
| • MTU                      | MTL 5048                |
| • Porsche                  | from MY 1996 to MY 2009 |

## Miscibility

Since the special advantages of GLYSANTIN® G30® will only be achieved when GLYSANTIN® G30® is used exclusively, mixing GLYSANTIN® G30® with other GLYSANTIN® coolants or engine coolants from other producers is not recommended.



## G30® Data Sheet

TI/EVO 1425 e January 2017  
Supersedes edition of June 2016

Page 2 of 6

GLYSANTIN® G30® should be blended with water in a concentration amongst 33 to 60% by volume prior to infilling. The usage of a 50/50 ratio for the mixture of water and GLYSANTIN® is generally advisable.

For preparation of the coolant it is recommended to use distilled or deionized water. In most cases tap water is also appropriate.

Analysis values of the water may not exceed the following threshold values:

Water hardness:	0 – 3.6 mmol/l
Chloride content:	max. 100 ppm
Sulfate content:	max. 100 ppm

### Chemical nature

**Ethylene glycol with corrosion inhibitors**

### Appearance

Clear liquid without solid contaminants

### Physical data

Density, 20 °C	1.122 – 1.125 g/cm <sup>3</sup>	DIN 51 757-3
Viscosity, 20 °C	22 – 26 mm <sup>2</sup> /s	DIN 51 562
Refractive index, 20 °C	1.432 – 1.436	DIN 51 423
Boiling point	> 160 °C	ASTM D 1120
Flash point	> 120 °C	DIN ISO 2592
pH value	8.2 – 8.6	ASTM D 1287
Reserve alkalinity	8 – 11 ml	ASTM D 1121
Water content	max. 3 %	DIN 51 777-1




# G30<sup>®</sup> Data Sheet

TI/EVO 1425 e January 2017  
Supersedes edition of June 2016

Page 3 of 6

<b>Stability</b>	Inhibitor stability after 168 h	no flocculation	VW TL 774 D/F
	Hard water stability after 10 days	no flocculation	VW PV 1426
<b>Frost protection</b>	Freezing point 50 vol % solution	below -38 °C	ASTM D 1177
	33 vol % solution	below -18 °C	

Frost Protection of GLYSANTIN<sup>®</sup> G30<sup>®</sup>

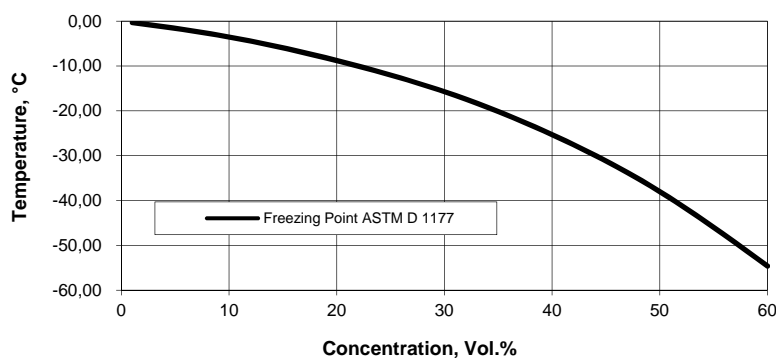

<b>Foaming characteristics</b>	33 vol % solution	max. 20 ml / max. 5 ml	VW TL 774-D/F
	33 vol % solution	max 50 ml / 3 s	ASTM D 1881
<b>Electrical conductivity</b>	30-50 vol % solution at 23 °C	approx. 4 mS/cm	ASTM D 1125



# G30<sup>®</sup> Data Sheet

TI/EVO 1425 e January 2017  
Supersedes edition of June 2016

Page 4 of 6

## Glassware Corrosion Test

ASTM D 1384

Metal coupons	typical weight change mg/coupon	ASTM D 3306 limit mg/coupon
Copper	-0.8	10 max
Solder	-1.2	30 max
Brass	-0.9	10 max
Steel	0.1	10 max
Cast iron	1.3	10 max
Cast aluminum	-4.0	30 max

## Simulated Service Test

ASTM D 2570

Metal coupons	typical weight change mg/coupon	ASTM D 3306 limit mg/coupon
Copper	-2.8	20 max
Solder	-1.7	60 max
Brass	-1.4	20 max
Steel	-0.3	20 max
Cast iron	3.0	20 max
Cast aluminum	-3.3	60 max

## Cavitation Erosion Corrosion Test

ASTM D 2809

	Rating	ASTM D 3306 limit Rating
Aluminum water pump	9	8 min

## Heat Transfer Corrosion Test

ASTM D 4340

	typical corrosion rate mg/cm <sup>2</sup> /week	ASTM D 3306 limit mg/cm <sup>2</sup> /week
G AISi6Cu4	0.3	1.0 max



## G30<sup>®</sup> Data Sheet

TI/EVO 1425 e January 2017  
Supersedes edition of June 2016

Page 5 of 6

### Polarization Resistance

NF R 15-602-9

	typical value	limit
Aluminum:	$1.2 * 10^6 \Omega \cdot \text{cm}^2$	NF R 15-601 $> 10^6 \Omega \cdot \text{cm}^2$

### Quality Control

The above data represent average values at the time of going to press of this technical information. They cannot be regarded as specified data. Specified product data are issued as a separate product specification.

### Storage Stability

GLYSANTIN<sup>®</sup> G30<sup>®</sup> has a shelf life of at least three years when stored in originally closed, air-tight containers at temperatures of maximum 30 °C. Do not use galvanized containers for storage.

### Color

GLYSANTIN<sup>®</sup> G30<sup>®</sup> is usually available in pink.



# G30<sup>®</sup> Data Sheet

TI/EVO 1425 e January 2017  
Supersedes edition of June 2016

Page 6 of 6

## Safety

When using this product, the information and advice given in our Safety Data Sheet should be observed. Due attention should also be given to the precautions necessary for handling chemicals

## Note

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

January 2017

[www.glysantin.com](http://www.glysantin.com)  
BASF SE  
Fuel and Lubricant Solutions  
67056 Ludwigshafen, Deutschland

®=registered trademark of BASF SE